


Option 1

In this option relays will only run when ignition is on and valve is in open position

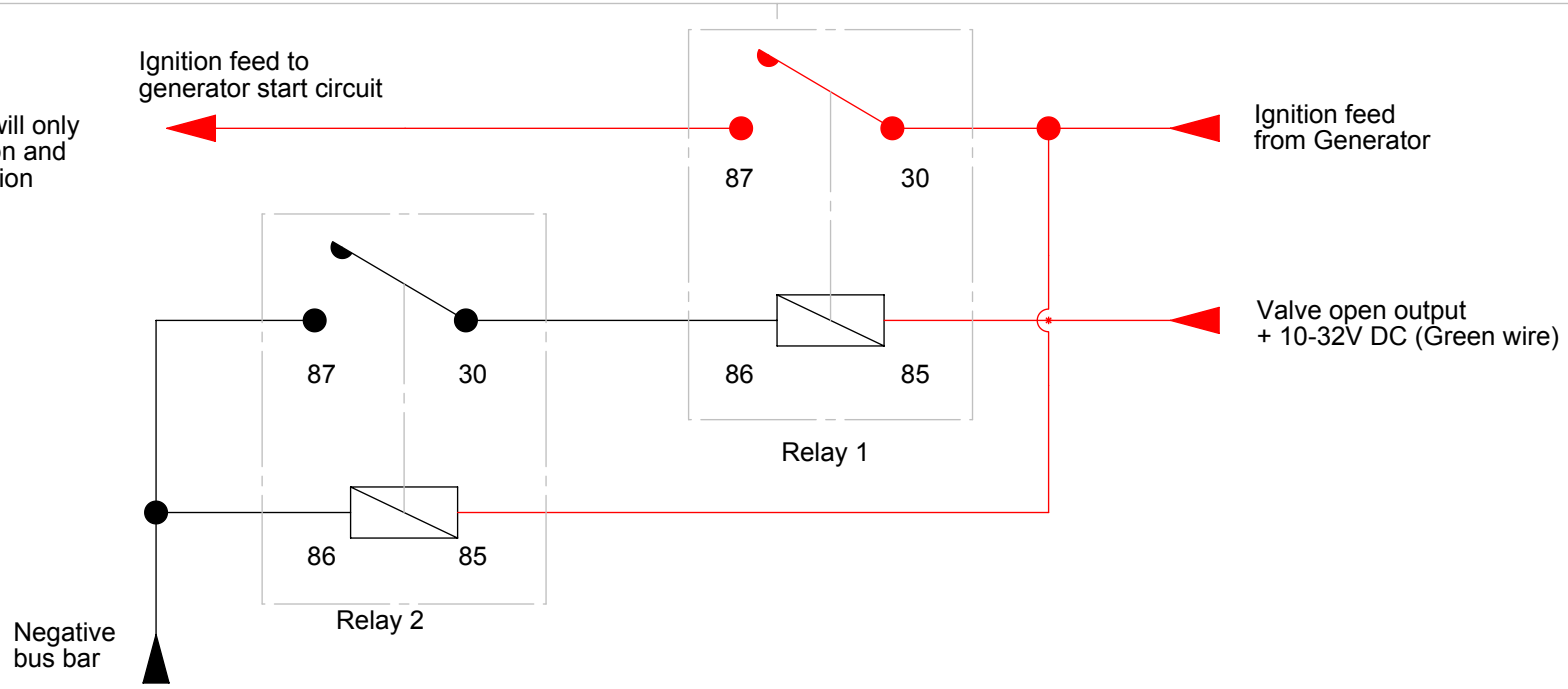


243 TI RAKAU DRIVE
EAST TAMAKI
AUCKLAND
NEW ZEALAND

P: 0064 9 274 5792
F: 0064 9 274 6722

www.trudesignplastics.com

Option 2

In this option relay 1 will run continuous while valve is in open position

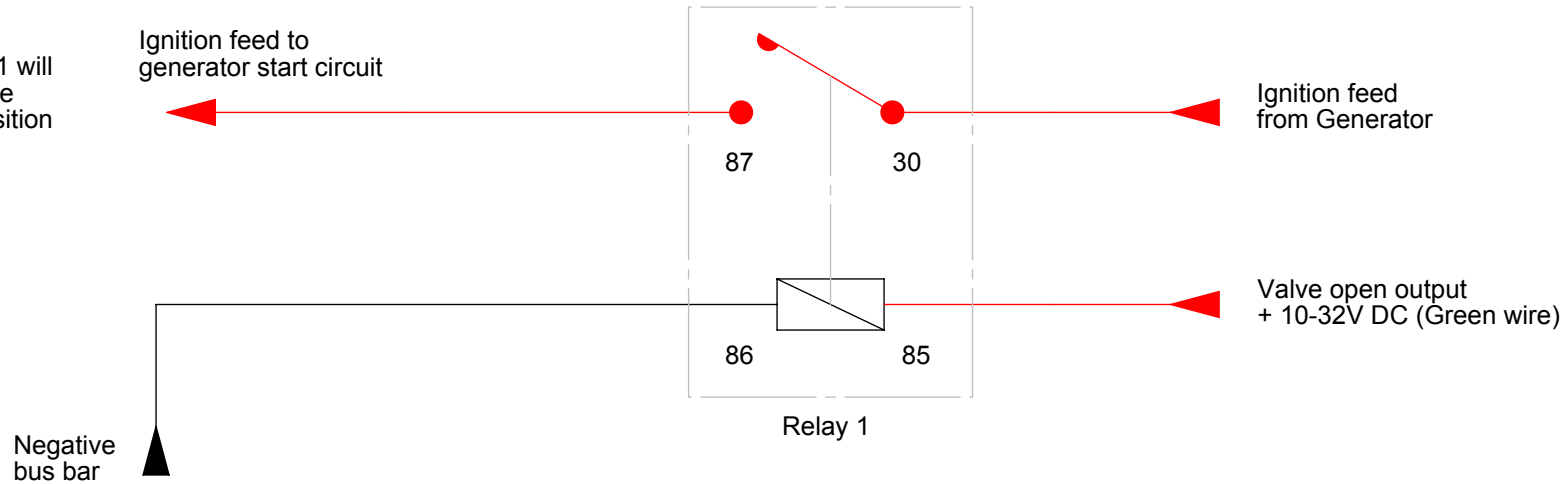

TOLERANCES

0	± 0.5
0.0	± 0.2
0.00	± 0.1
0°	± 1°

□ - QA DIMS

Ball Valve Ignition Interlock Wiring

Tru Design Plastics
Drawing Last Revised : 24/03/09
Drawn By : C I Pretty

E001

A4

SCALE
1:2

ISSUE: ①

MATERIAL:
N/A


TREATMENT:
N/A

MODEL FILENAME: N/A
UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN MILLIMETERS

SHEET
1 OF 2


Optie 1

Bij deze schakeling loopt er alleen stroom als de startschakelaar op starten staat en de afsluiter open staat

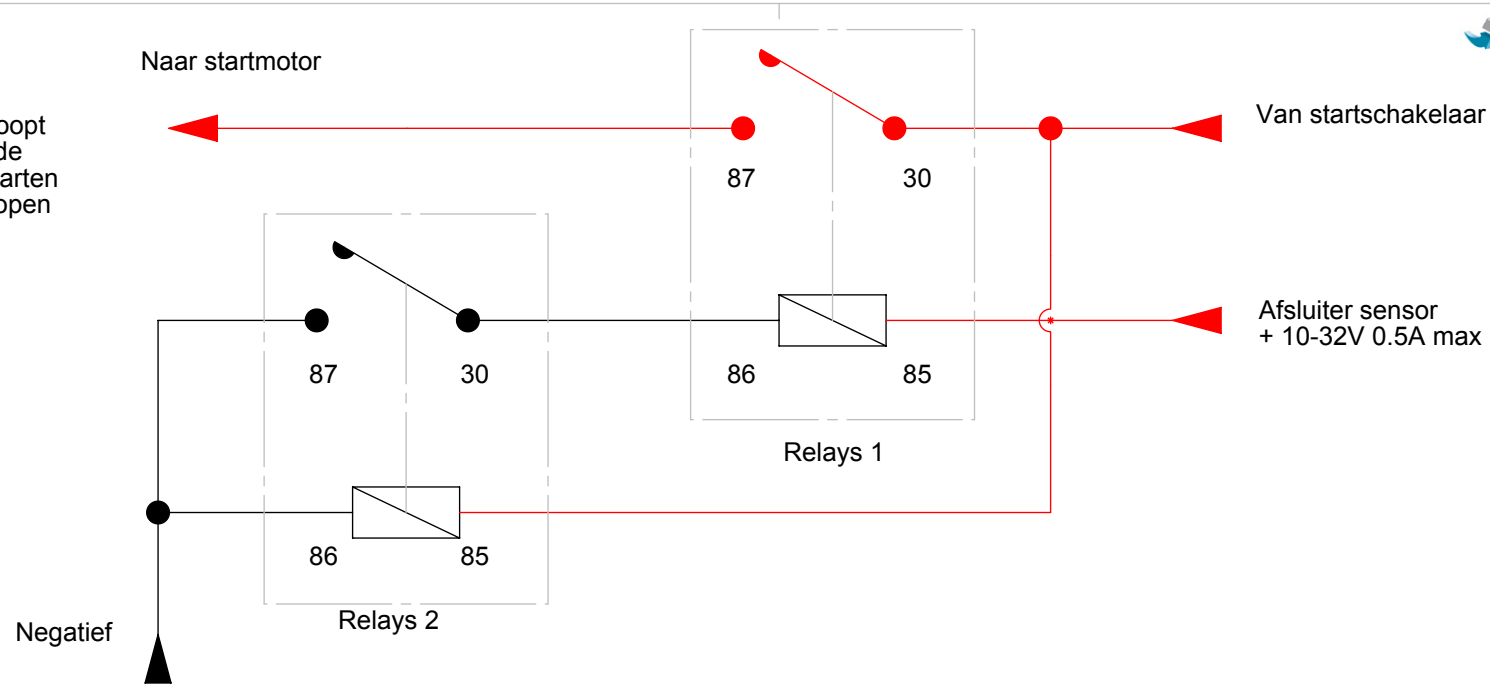

Optie 2

Bij deze schakeling zal relays continue bekrachtigd zijn als de afsluiter open staat

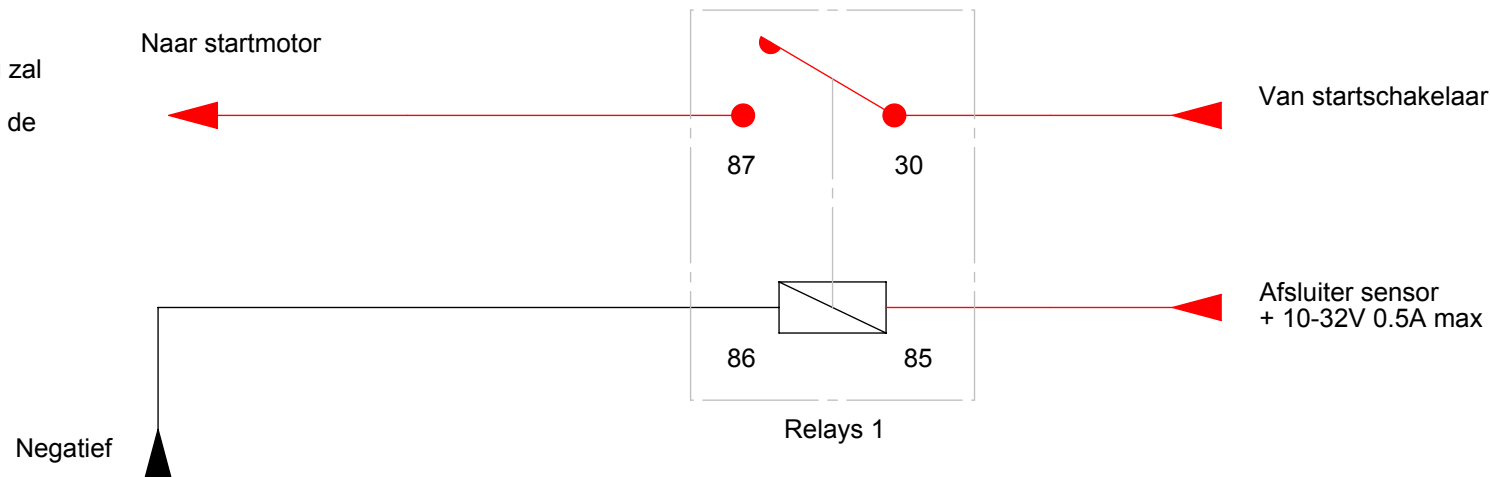

TOLERANCES

0	± 0.5
0.0	± 0.2
0.00	± 0.1
0°	± 1°

□ - QA DIMS

Ball Valve Ignition Interlock Wiring

Tru Design Plastics
Drawing Last Revised : 24/03/09
Drawn By : C I Pretty

E001

A4

SCALE
1:2

ISSUE: ①	MATERIAL: N/A	TREATMENT: N/A	MODEL FILENAME: N/A UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN MILLIMETERS	SHEET 2 OF 2
----------	---------------	----------------	--	-----------------